


LEFT HAND ROPE SETUP

FRONT OF MACHINE

SUPPLY THREAD SHOULD ALWAYS BE WOUND THE SAME DIRECTION ON THE SUPPLY SPOOL AND EACH SPOOL SHOULD BE MOUNTED IN THE SAME DIRECTION SO THE SUPPLY LINE COMES FROM THE CORRECT SIDE OF THE SUPPLY SPOOL

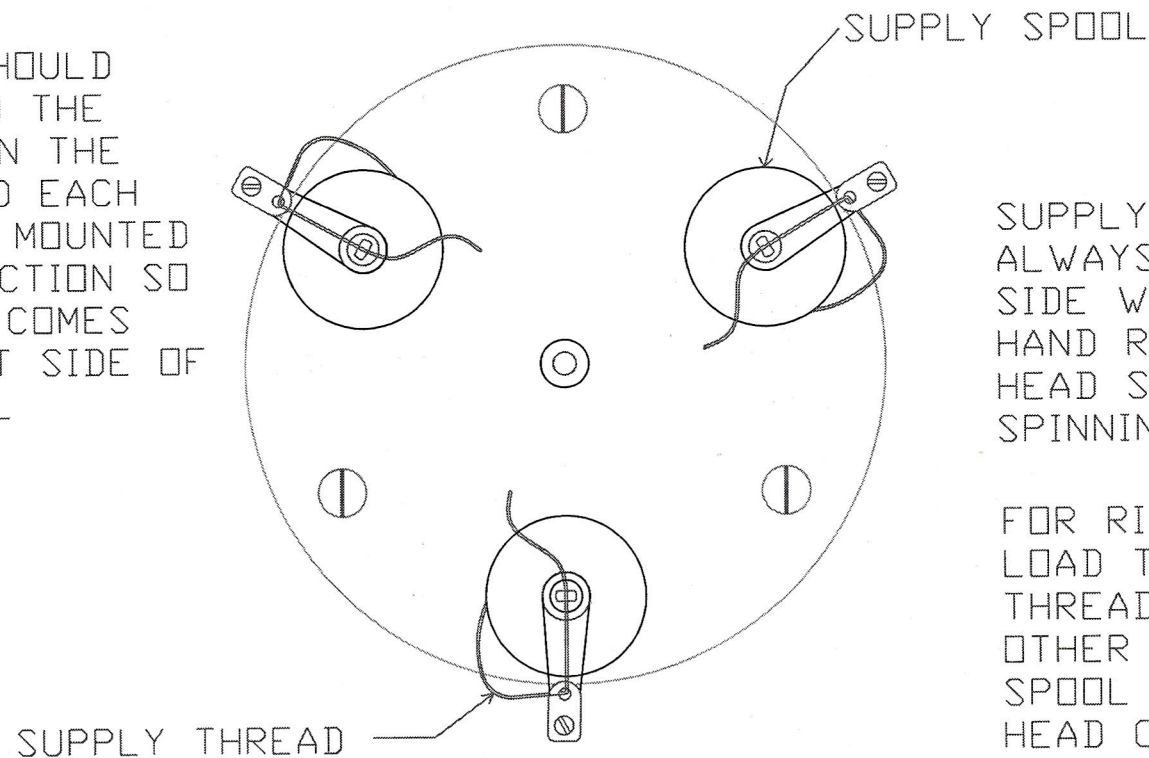

SUPPLY THREAD SHOULD ALWAYS FEED FROM THIS SIDE WHEN DOING LEFT HAND ROPE AND THE HEAD SHOULD BE SPINNING CCW.

FOR RIGHT HAND ROPE LOAD THE SPOOLS SO THE THREAD FEEDS FROM THE OTHER SIDE OF THE SPOOL AND ROTATE THE HEAD CL